

Pelletization Technologies:

Fundamentals, Machinery,
and Industrial Applications

Authors
İsmet ÇELİK
Ahmet DAYANÇ



BIDGE Publications

Pelletization Technologies: Fundamentals, Machinery, and Industrial Applications

Authors: Prof. Dr. İsmet ÇELİK, Res. Asst. Ahmet DAYANÇ

Editor: Dr. Öğr. Üyesi Feridun Karakoç

ISBN: 978-625-8673-51-7

1st Edition

Page Layout By: Gozde YUCEL

Publication Date: 25.12.2025

BIDGE Publications

All rights reserved. No part of this work may be reproduced in any form or by any means, except for brief quotations for promotional purposes with proper source attribution, without the written permission of the publisher and the editor.

Certificate No: 71374

All rights reserved © BIDGE Publications

www.bidgeyayinlari.com.tr - bidgeyayinlari@gmail.com

Krc Bilişim Ticaret ve Organizasyon Ltd. Şti.

Güzeltepe Mahallesi Abidin Daver Sokak Sefer Apartmanı No: 7/9 Çankaya / Ankara



Contents

Definition, Historical Perspective, and Multidimensional Classification Analysis	7
Introduction	7
Technical Definition of Pelletization and Physical Fundamentals	7
Historical Development of Pelletization and Industrial Evolution	9
Agricultural Origins and 19th-Century Applications	9
The 20th Century: Formation of Industrial Standards	9
Transition to the Energy Sector and 21st-Century Dynamics	10
The Logic of Pellet Classification	10
Categorization by Intended Use	10
Classification by Feedstock and Processing Technique	11
Advanced Pelletization Technologies: Torrefaction and Steam Explosion	13
Torrefied Pellets	13
Steam Explosion Pellets	14
Binder Mechanisms and Chemistry in Pelletization	15
Pelletization Applications Across Industrial Sectors	16
Standards, Quality Control, and Regulatory Framework	17
Process Engineering: Pellet Plant Operations	18

Circular Economy and Future Projection: 2030 and Beyond	19
Conclusion	21
References	22
Fundamentals of Pellet Manufacturing Process	28
Introduction	28
Classical Design Architectures in Pellet Machines	28
Flat-Die Pellet Mills	29
Ring-Die Pellet Mills	30
Pressing Kinematics and Theoretical Pressure Modeling	32
Pressure Distribution Within the Press Channel	32
The Nip Zone and Material Flow Dynamics	33
Feeding Systems: Flow Control and Stability	35
Screw Feeders	36
Force Feeders	36
Conditioning Units and Hydrothermal Activation	36
Steam and Thermodynamic Effects	37
Conditioning Parameters and Optimization	38
Material Specifications and Engineering Requirements	38
Biomass and Wood Pelletization Dynamics	39
Compound Feed and Aquatic Feed	39
Lubrication Strategies	39
Wear and Failure Analysis	40

Industrial Implications and Forward Outlook.....	41
References.....	42
Drive Systems and Maintenance Strategies For Pelletizing Machines	47
Introduction.....	47
Drive Systems and Power-Transmission Architecture: Efficiency and Torque Dynamics	49
Comparative Analysis of Belt and Gear Drive Systems	49
Direct Drive Technology and Its Operational Advantages	50
Tribology and Wear Mechanisms: Metallurgical and Geometric Interactions.....	51
Die Metallurgy and Material Selection Criteria.....	51
Compression Ratio and Channel Geometry.....	52
Surface Roughness and Friction Physics: The Performance– Quality Relationship	53
Effects of Ra on Friction and Energy.....	54
Effect of Surface Roughness on Product Quality	54
Maintenance Engineering and Predictive Maintenance Strategies	55
Vibration Analysis and Fault Diagnosis.....	55
Thermography and Motor Diagnostics	56
Lubrication Management and Advanced Tribological Solutions	56
Ceramic-Based and Specialized Industrial Greases.....	56

Bearing Failure Modes and Root Cause Failure Analysis (RCFA)	57
Roller Reconditioning Process	59
Spare-Parts Strategy and Operational Inventory Management	59
ABC–VED–FSN Analysis Matrix	60
Supply Chain and Lead-Time Management	61
Conclusion and Future Prospects	61
References	62

Definition, Historical Perspective, and Multidimensional Classification Analysis

Introduction

Pelletization is a sophisticated agglomeration process in which fine-grained or powdered materials are transformed into larger, homogeneous, and higher-density particles through mechanical forces and, in some cases, thermal treatments (Carlson & Kozicki, 2025; Wikipedia, 2025d). This technology offers critical advantages such as reducing dust emissions in material handling, optimizing logistics costs, and increasing energy or material density per unit volume (Carlson & Kozicki, 2025; UDMachine, 2024). At an industrial scale, pelletization is not merely a physical change in form; rather, it constitutes an engineering discipline that redefines a material's reactivity, combustion characteristics, and flowability (UDMachine, 2024; Wikipedia, 2025d).

Technical Definition of Pelletization and Physical Fundamentals

In the engineering literature, pelletization is regarded as a sub-branch of agglomeration (particle size enlargement) methods. This process enables powdered materials to be consolidated into a defined geometric form (typically cylindrical or spherical). At its core, pelletization stabilizes interparticle attractive forces (Van der Waals forces, capillary forces, and electrostatic forces) through

¹ Prof. Dr., Kutahya Dumlupınar University, Mechanical Engineering,
ORCID: 0000-0002-6564-0880

² Research Assistant, Kutahya Dumlupınar University, Mechanical Engineering,
ORCID: 0000-0002-5214-9021

mechanical compression or rolling motion (Atangsaputra, 1990; Wikipedia, 2025d).

The pelletization process is implemented via two principal technical approaches: pressure extrusion (pelleting) and growth by rolling (briquetting). In pressure extrusion (pelleting), the material is forced under high pressure through the openings of a die, thereby forming cylindrical structures. This method is widely used in the production of wood pellets, animal feed, and fuels. In the rolling-growth technique, the material is treated with a liquid binder inside a rotating disc or drum and acquires spherical forms via coalescence. This method is preferred for the agglomeration of iron ore and chemical powders (Carlson & Kozicki, 2025; Wikipedia, 2025d). The physical dynamics of the process are dominated by capillary forces within the material. Studies indicate that the mechanical strength of pellets is directly related to the surface tension of liquid bridges formed within the micro-voids between material particles. Particularly in the briquetting of lignite and coal derivatives, the particle size distribution promotes the narrowing of capillary channels and, consequently, increases briquette strength (Atangsaputra, 1990). Table 1 below compares the two techniques.

Table 1: Pelleting vs Briquetting

Parameter	Pressure Extrusion (Pelleting)	Tumbling Growth (Briquetting)
Fundamental Mechanism	High mechanical compaction	Tumble-growth (growth by rolling), press and molding
Product Form	Cylindrical pellets	Spherical granules and blocks
Binder Requirement	Generally low, or relies on natural binders	Typically requires liquid binder agents
Main Applications	Wood fuel, animal feed, plastics	Iron ore, fertilizers, chemical powders
Bulk Density	Very high	Medium-high

Historical Development of Pelletization and Industrial Evolution

The history of pelletization technology has evolved in parallel with humanity's need to enhance raw-material efficiency and manage waste. The earliest applications emerged from agricultural needs in the mid-19th century.

Agricultural Origins and 19th-Century Applications

The first examples of pellet-form products entered the literature in the 19th century as “compound feeds” developed by British horse breeders (Yemtar, 2025). In this period, these structures produced by mixing and baking grains such as oats, peas, rye, and maize and referred to as “biscuits” served as concentrated energy sources, particularly for war and transport horses. Experiments conducted by the Prussian army found that 1.5 kg of this compound feed could substitute for 5 kg of pure oats (Future Fortune, 2024). This constituted one of the earliest demonstrations of the logistical and nutritional efficiency gains enabled by pelletization.

The 20th Century: Formation of Industrial Standards

In the early 20th century, the mass-production demands brought about by the industrial revolution facilitated the mechanization of pellet mills. Initial extrusion trials were conducted in the 1910s; however, the complexity of these machines and their high operating costs delayed widespread adoption (Castaldo, 2019). In the 1920s and 1930s in Europe, low-density “wafer” machines consisting of counter-rotating rollers began to be used (Yemtar, 2025).

A major industrial turning point occurred in 1928, when Purina began pelletizing flour mill residues (Coffey, Dawson, Ferket, & Connolly, 2016; Future Fortune, 2024). Fine flour by-products (wheat midds), which mills had discharged into waterways

and which caused environmental pollution, were converted into valuable animal feed through pelletization. By the late 1930s, the commercialization of “Schueler”-type flat-die presses, followed by vertical cylindrical ring-die machines, laid the foundation of the modern pellet industry.

Transition to the Energy Sector and 21st-Century Dynamics

The oil crises of the 1970s shifted the focus of pelletization technology from feed to the energy sector. Compressing forestry residues for use as a substitute for charcoal strengthened the concept of bioenergy. In the 1980s and 1990s, the integration of high-shear expanders and steam conditioning units enhanced the physical quality and hygienic standards of pellets (Castaldo, 2019; Yemtar, 2025). From the 2000s onward, pelletization has increasingly converged with advanced thermal treatments such as torrefaction and steam explosion, evolving into black pellet technology in line with carbon-neutral targets (Onyenwoke et al., 2024; Cremers et al., 2015).

The Logic of Pellet Classification

Pellet technology exhibits a complex classification logic along the axes of feedstock origin, production process, and intended end use. This classification determines not only the physical form of the product but also the legal standards to which it is subject and its market value (Huang, 2014b; UseWoodFuel, 2018).

Categorization by Intended Use

Pellets can be grouped into four main categories according to their industrial function: fuel pellets, feed pellets, chemical pellets, and industrial raw-material pellets.

Fuel Pellets (Energy Sector)

Fuel pellets occupy a central position in renewable energy strategies. They are broadly divided into biomass pellets and coal/lignite-derived pellets (Eyri & Çelik, 2021). Biomass pellets are produced from woody residues, agricultural by-products, and energy crops, whereas coal-derived pellets are obtained by upgrading low-grade coal fines (Fabon Engineering, 2025; Goksel, 1981; Wikipedia, 2025c). In the classification of fuel pellets, key criteria include calorific value (MJ/kg), ash content, and moisture content (Huang, 2014b; Propellets Africa, 2025).

Animal Feed Pellets

Feed pellets constitute a form that increases the digestibility of agricultural feedstocks for animals and facilitates logistics. They are produced in specific diameters (from 1.2 mm to 10 mm) for different types such as poultry, cattle, and fish feeds. In the classification of these pellets, nutritional homogeneity, microbiological safety, and water stability (for fish feeds) are of critical importance.

Chemical and Industrial Pellets

In the chemical industry, pelletization is used for catalysts, plastic feedstocks (nurdles), and fertilizer production. In the iron and steel industry, “metallurgical pelletization” is essential so that iron ore fines can be processed in blast furnaces. Chemical pellets are typically designed to maximize reaction surface area (IspatGuru, 2015; Wikipedia, 2025a).

Classification by Feedstock and Processing Technique

The diversity of feedstocks in pelletization technology forms the basis for selecting production parameters and binders. Table 2 below presents processing profiles by pellet type.

Table 2: Pellet-Type Processing Profiles

Pellet Type	Feedstock Source	Processing Characteristic	Key Benefit
White Pellets	Untreated wood/sawdust	Standard drying and pellet pressing	Low ash content, widely used
Black Pellets	Torrefied / steam-exploded biomass	Thermal pretreatment (200–300°C)	Hydrophobicity, high energy density
Lignite Pellets	Low-grade coal fines	Agglomeration using bitumen/pitch binder	Improved resistance to self-heating, high calorific value
RDF Pellets	Municipal / industrial waste	Mechanical separation and fuel preparation (RDF production)	Waste-to-energy, reduced landfill demand

Biomass Pellets: The Woody–Herbaceous Distinction

Within the framework of ISO 17225 standards, biomass pellets are classified by origin as woody, herbaceous, fruit, and aquatic biomass. In Figure 1 below, 8 kinds of biomass pellets is presented.



Figure 1: 8 Kinds of Biomass

Reference: Gemco Energy, 2025a

Woody biomass pellets typically exhibit higher energy density and lower ash content (Altun & Çelik, 2021). Herbaceous pellets (e.g., straw, corn stover) may require specialized combustion

systems due to elevated chlorine and potassium contents (Bioenergy Association, 2018; UseWoodFuel, 2018).

Coal Derivatives and Lignite Pelletization

Pelletization of coal fines and lignite is performed to convert these low-value by-products into marketable fuels. In lignite pelletization, thermal pretreatment and binder usage are critical due to the material's high inherent moisture content (35–60%) and low fixed-carbon fraction. Lignite pellets produced using bituminous emulsions or coal-tar pitch can reach calorific values above 9,500 Btu/lb (22 MJ/kg) (University of Kentucky, 2025; Wikipedia, 2025b). In coal (lignite) dust agglomeration, briquetting technology is preferred when production efficiency is taken into consideration.

Advanced Pelletization Technologies: Torrefaction and Steam Explosion

Advanced technologies that push the limits of conventional pelletization aim to produce “energy-dense” fuels by shifting biomass physical and chemical properties closer to those of coal.

Torrefied Pellets

Torrefaction is a “mild pyrolysis” process conducted in an oxygen-free environment at 200–300°C. During this process, hemicellulose decomposes, while the material loses oxygen and hydrogen and becomes enriched in carbon.

The extent of torrefaction is primarily governed by the residence time of a (dry) biomass particle in the torrefaction reactor and by the reactor temperature. In general, increasing either the operating temperature or the residence time results in a higher torrefaction severity. However, temperature and residence time should not be considered fully substitutable parameters, as their effects are not entirely equivalent.

While the operating conditions differ somewhat across reactor configurations, the fundamental approach to torrefaction and densification remains consistent and typically includes heat integration. In Figure 2 below, an overview of heat integration options is presented.

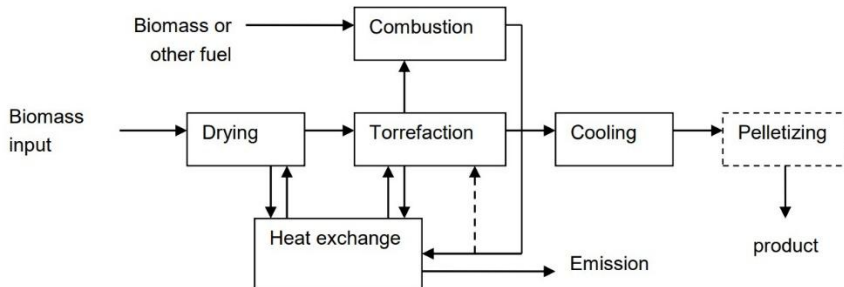


Figure 2: Overview of heat integration options

Reference: Cremers et al., 2015

Technical Effects of Torrefaction:

- **Hydrophobic Character:** Torrefied pellets acquire water-repellent properties, enabling outdoor storage without degradation.
- **Grindability:** The fibrous structure of biomass is disrupted, rendering it brittle like coal, which facilitates direct use (co-firing) in coal-fired power plants (Butler, Skrivan, & Lotfi, 2023; Rinke Engineering, 2023).
- **Energy Density:** A shipload of torrefied pellets can carry 30–50% more energy (GJ) than white pellets.

Steam Explosion Pellets

Steam explosion is based on treating biomass with high-pressure steam (180–220°C and 3.4 MPa) followed by an abrupt pressure release. This process disrupts fibers at the molecular level and liberates lignin, a natural adhesive. Steam-exploded pellets are

dark-colored, high-density, and similar to torrefied pellets; however, they differ in production costs and energy losses. Table 3 below shows the differences among White Pellets, Torrefied Pellets, and Steam Explosion Pellets.

Table 3: White Pellets, Torrefied Pellets and Steam Explosion Pellets

Criterion	White Pellets (Standard)	Torrefied Pellets	Steam-Exploded Pellets
Heating Value (MJ/kg)	16.5–19.0	20.0–24.0	19.5–23.5
Water Resistance	Very low (disintegrates)	High (hydrophobic)	High
Grindability	Difficult	Easy	Moderate
Production Cost	Low	High	Medium/high
Color	Light brown	Black	Dark brown

Binder Mechanisms and Chemistry in Pelletization

Keeping particles bound together is the core physico-chemical challenge of pelletization. Binders provide mechanical resistance by filling interparticle voids and prevent pellet dusting during transport.

Natural Binders: Lignin and Starch

In biomass pelletization, the most important natural binder is lignin. Lignin is a complex polymer found in the cell walls of trees and plants; it plasticizes at temperatures of 100–130°C and behaves like a “natural glue” that locks particles together. Starch is used particularly in feed pelletization and in the agglomeration of agricultural residues. Under the influence of moisture and heat, gelatinized starch forms strong solid bridges between particles (Butler et al., 2023; Huang, 2014a).

Inorganic and Organic Synthetic Binders

Some materials (e.g., iron ore or low-lignin grasses) do not contain sufficient natural binders. In such cases, external agents are added:

- **Bentonite:** A conventional inorganic binder in iron ore pelletization. However, its use is limited in modern plants because it can introduce impurities into steel.
- **Bitumen and Pitch:** Used in coal and lignite pelletization to provide water resistance and increase calorific value.
- **Molasses:** Molasses is the residue remaining after crystalline sugar has been extracted from syrups under the technical and economic conditions of sugar production.
- **Synthetic Polymers:** Substances such as CMC (carboxymethyl cellulose) and polyacrylamide can deliver very high mechanical strength at low dosages (0.1–0.5 wt%) (Liu et al., 2025; Zhao, Zhou, Ma, Wei, & Long, 2022).

Pelletization Applications Across Industrial Sectors

Pelletization technology encompasses specialized sub-processes tailored to the distinct requirements of each sector.

Metallurgy: Iron Ore Pelletization

Iron ore pellets are the primary feedstock for blast furnaces and direct reduction (DRI) plants. Fine ore concentrates are mixed with bentonite or lime and spheroidized in disc pelletizers. These spheres (“green pellets”) are hardened by induration in furnaces at 1200–1300°C. The basicity of DRI-grade pellets is typically below 0.1, and their high porosity enables rapid penetration of reducing gases into the core.

Plastics Industry: Nurdles and Thermoplastics

Plastic production begins by converting polymers into standardized pellets known as “nurdles.” Thermoplastics (e.g., PET, HDPE, PP) form a cornerstone of the circular economy because they can be repeatedly melted and pelletized. The plastic pelletization process includes sorting, cleaning, grinding, extrusion, and cutting in a water bath. In PET pelletization, pre-extrusion drying is mandatory to prevent hydrolysis of the material (Retech Machinery, 2025).

Pharmaceutical and Chemical Applications

In the pharmaceutical industry, pelletization is used to enable controlled release of active ingredients and to maintain dosage uniformity. Spray congealing and balling agglomeration techniques are common. In the chemical sector, catalysts are produced in pellet form to ensure optimal gas flow within reactor beds.

Standards, Quality Control, and Regulatory Framework

In the pellet market, reliable trade depends on compliance with standards. The process that began in Europe with EN 14961-2 has now been standardized globally through the ISO 17225 series (Kittle, 2022; Kofman, 2021).

ISO 17225: The Standard for Solid Biofuels

The ISO 17225 standards series classifies biofuels by feedstock origin and physical properties.

- ISO 17225-2 (Wood Pellets): Defines A1, A2, and B classes for residential and commercial use. A1 represents “premium” quality with an ash content below 0.7%.

- ISO 17225-8 (Torrefied Pellets): The most recent standard for thermally treated biofuels, updated in 2023. It specifies the

energy density and hydrophobicity levels of torrefied pellets (Institute for Standardization of Montenegro, 2023).

Turkish Standards (TS EN ISO 17225)

In Türkiye, pellet production and export are governed by TS EN ISO 17225-2 as published by the Turkish Standards Institution (TSE). Companies intending to export are required to enter the ENplus certification system and obtain analysis reports from accredited laboratories. While A1 and A2 classes are preferred for residential use (stoves and fireplaces), I1 and I2 classes are categorized for industrial facilities (Aşan Danışmanlık, 2025; TSE, 2022).

Table 4: Standards

Standard Code	Scope	Critical Parameters
ISO 17225-2	Wood Pellets	Ash, moisture, mechanical durability, nitrogen
ISO 17225-6	Herbaceous Pellets	Chlorine, sulfur, ash melting temperature
ISO 17225-8	Thermally Treated Pellets	Volatile matter, fixed carbon, heating value

Process Engineering: Pellet Plant Operations

A modern pelletization line consists of a sequential series of unit operations that alter the physical and chemical nature of the feedstock.

1. Feedstock Preparation and Size Reduction

Before entering the pellet press, the feedstock (sawdust, wood chips, or agricultural residues) must be brought to a homogeneous particle size distribution (typically 2–5 mm). At this stage, hammer mills and crushers are employed. In iron ore pelletization, by contrast, the material is ground to the micron scale in rod mill or ball mill units.

2. Drying Technologies

The optimal moisture content for pelletization is generally in the 10–15% range. Fresh biomass may contain 40–60% moisture; therefore, rotary dryers or fluidized bed dryers are used to remove water. Failure to establish a stable moisture balance can cause pellets to disintegrate at the press outlet or lead to die blockage (Gemco Energy, 2025b; Kamperidou, 2022).

3. Conditioning

Prior to pressing, the material is softened by treatment with steam or water. This step is critical for activating natural binders (lignin/starch). In the feed industry, conditioning also serves a pathogen-reduction (pasteurization) function.

4. Pressing and Cooling

The material is shaped by being forced through the die openings via rotating rollers. The hot pellets exiting the press (70–95°C) must be cooled immediately; otherwise, they may lose durability due to moisture condensation. Counterflow coolers are among the most efficient equipment options at this stage.

Circular Economy and Future Projection: 2030 and Beyond

Pelletization is a strategic instrument in combating climate change one of the most significant challenges of the 21st century. In line with carbon-neutral targets, the technology's application domains are expanding rapidly (European Commission, 2025; Goldman Sachs, 2022; Neto, 2025).

Biochar Pelletization and Carbon Sequestration

Biochar has the ability to retain carbon in soils for centuries when applied as a soil amendment. However, applying powdered biochar to land is operationally difficult and can cause

environmental pollution. Pelletizing biochar enables its straightforward incorporation into soil using agricultural machinery. This pathway is regarded as a critical lever for 2030 targets within the scope of “Negative Emission Technologies” (Ellen Macarthur Foundation, 2021; Gabrielli, Gazzani, & Mazzotti, 2020; Mars Mineral, 2024).

Waste-to-Energy: RDF and SRF Pellets

Pelletizing municipal solid waste into Refuse-Derived Fuel (RDF) represents a low-cost option for cement plants and power stations that can also reduce carbon emissions. The European Union’s circular economy action plan encourages the use of such alternative fuels and aims to increase the recovery rate of municipal waste by 2030.

Economic Analysis: Torrefied vs. White Pellets

The most significant barrier to the broader adoption of advanced pelletization systems is high capital expenditure (CAPEX). Techno-economic analyses indicate that a torrefaction reactor accounts for approximately 51% of total equipment costs. Nevertheless, the logistics savings provided by torrefied pellets primarily lower transportation costs due to higher energy density can offset this cost over the long term.

Pelletization technology continues to evolve far beyond a purely physical agglomeration operation, increasingly aligning with global sustainability, energy security, and industrial efficiency imperatives. This trajectory from 19th-century horse feed to 21st-century high-technology torrefied biofuels symbolizes the creativity of engineering science in raw-material management. Within the 2030 and 2050 vision, pelletization will remain not merely a production step, but a foundational circular-economy lever through

which carbon is managed and wastes are converted into value (Energy Transitions Commission, 2021).

Conclusion

Historically, pelletization began as a simple compaction method; over time, however, it has become a strategic industrial process. Today, biomass pellet fuels offer a lower-carbon alternative to fossil fuels, while the metallurgical sector can process low-grade ores efficiently through pelletization. A detailed examination of pelletization demonstrates that feedstock properties (particle size, moisture, composition) and binder chemistry directly affect pellet quality. Rapid growth over the last two decades especially in biomass pellets has driven technological improvements and standardization. In the coming period, academic and industrial research is expected to continue in areas such as integrating diverse wastes into the circular economy, developing new bio-based binders, and optimizing the energy efficiency of pelletization processes. Accordingly, pelletization technology will continue to play a key role in sustainable material management and energy production.

References

Altun, B., & Çelik, İ. (2021). Kütahya tavşanlı ilçesi şehir merkezlerinden toplanan park bahçe atıklarının pelet yakıtı olarak kullanılabilirliği. *ISARC International Science and Art Research Center*, 975–983. Ankara.

Aşan Danışmanlık. (2025). Pelet Yakıt Belgelendirme. Retrieved December 24, 2025, from <https://asandanismanlik.com/pelet-yakit-belgelendirme/>

Atangsaputra, K. (1990). The application of granulation to fine coal preparation. Retrieved December 24, 2025, from <https://ro.uow.edu.au/ndownloader/files/50349120/1>

Bioenergy Association. (2018). International wood fuel standard. Retrieved December 24, 2025, from <https://www.usewoodfuel.org.nz/documents/admin/TNSB28-International%20wood%20pellet%20standard.pdf>

Butler, J. W., Skrivan, W., & Lotfi, S. (2023). Identification of Optimal Binders for Torrefied Biomass Pellets. *Energies* 2023, Vol. 16, Page 3390, 16(8), 3390. <https://doi.org/10.3390/EN16083390>

Carlson, C., & Kozicki, C. (2025). What is Pelletizing? Retrieved December 24, 2025, from <https://feeco.com/what-is-pelletizing/>

Castaldo, D. (2019). History of pelleting. Retrieved December 24, 2025, from https://img.feedstrategy.com/files/base/wattglobalmedia/all/image/s-tatic/feedstrategy/feed-pelleting-reference-guide/1-1_Pelleting_History.pdf

Coffey, D., Dawson, K., Ferket, P., & Connolly, A. (2016). Review of the feed industry from a historical perspective and implications for its future. *Journal of Applied Animal Nutrition*, 4, e3. <https://doi.org/10.1017/JAN.2015.11>

Cremers, M., Koppejan, J., Middelkamp, J., Witkamp, J., Sokhansanj, S., Staffan Melin, C., & Sebnem Madrali, C. (2015). *Status overview of torrefaction technologies: A review of the commercialisation status of biomass torrefaction*. IEA Bioenergy

Ellen Macarthur Foundation. (2021). *How the circular economy tackles climate change*.

Energy Transitions Commission. (2021). *Net-Zero Steel Sector Transition Strategy*.

European Commission. (2025). Circular economy could slash up to 231 million tonnes of CO₂ from heavy industry per year . Retrieved December 24, 2025, from https://joint-research-centre.ec.europa.eu/jrc-news-and-updates/circular-economy-could-slash-231-million-tonnes-co2-heavy-industry-year-2025-10-03_en

Eyri, B., & Çelik, İ. (2021). Çam talaşı biyokütlesi ve kömür karışımlarının pelet yakıt preslerinde peletlenebilirliği. 7. *Uluslararası Mühendislik Mimarlık ve Tasarım Kongresi*, 129–136. İstanbul.

Fabon Engineering. (2025). COAL VS BIOMASS PELLETS-WHICH FUEL IS BETTER FOR INDUSTRIES. - FABON. Retrieved December 24, 2025, from <https://fabon.in/coal-vs-biomass-pellets/>

Future Fortune. (2024). The History of Animal Feed Pelleting . Retrieved December 24, 2025, from <https://www.pelletfeed.com/resources/the-history-of-animal-feed-pelleting.html>

Gabrielli, P., Gazzani, M., & Mazzotti, M. (2020). The Role of Carbon Capture and Utilization, Carbon Capture and Storage, and Biomass to Enable a Net-Zero-CO₂ Emissions Chemical Industry. *Industrial & Engineering Chemistry Research*, 59(15), 7033–7045. <https://doi.org/10.1021/ACS.IECR.9B06579>

Gemco Energy. (2025a). Analysis of the combustion characteristics of 8 kinds of biomass pellets. Retrieved December 24, 2025, from <http://www.gemcopelletmills.com/biomass-pellets-combustion-characteristi.html>

Gemco Energy. (2025b). Wood Pellet Plant Process: Mastery Of Pelletizing Technology. Retrieved December 24, 2025, from <https://www.gemco-energy.com/guide-to-start-wood-pellet-plant/biomass-wood-pellet-plant-process-pelletizing-technology.html>

Goksel, M. (1981). US4412840A - Pelletizing lignite - Google Patents. Retrieved December 24, 2025, from <https://patents.google.com/patent/US4412840A/en>

Goldman Sachs. (2022). The evolution towards a circular economy. Retrieved December 24, 2025, from <https://www.goldmansachs.com/pdfs/insights/pages/gs-research/gs-sustain-circular-economy/report.pdf>

Huang, J. (2014a). How To Use The Lignin And Binders To Make Your Own Pellets. Retrieved December 24, 2025, from <https://www.biofuelmachines.com/Lignin-And-Binders-For-Making-Your-Own-Pellets.html>

Huang, J. (2014b). Wood Pellets Quality Standards Research. Retrieved December 24, 2025, from <https://www.biofuelmachines.com/wood-pellets-quality-standards-study.html>

Institute for Standardization of Montenegro. (2023). ISO 17225-8:2023. Retrieved December 24, 2025, from <https://isme.me/en/project/show/iso:proj:83584>

IspatGuru. (2015). Understanding Pellets and Pellet Plant Operations. Retrieved December 24, 2025, from <https://www.ispatguru.com/understanding-pellets-and-pellet-plant-operations/>

Kamperidou, V. (2022). Quality Analysis of Commercially Available Wood Pellets and Correlations between Pellets Characteristics. *Energies* 2022, Vol. 15, Page 2865, 15(8), 2865. <https://doi.org/10.3390/EN15082865>

Kittle, J. (2022). Pellet Certification - Which pellets should I buy? - Jennings Chimney Sweeping. Retrieved December 24, 2025, from <https://jenningschimneysweeping.com/pellet-certification-what-pellets-should-i-buy/>

Kofman, P. D. (2021). *Review of worldwide standards for solid biofuels, revised April 2021*. Retrieved from <https://www.coford.ie/media/coford/content/publications/2022/3ReviewofWorldwideStandardsforSolidBiofuelsRevisedApril2021291021310322.pdf>

Liu, Y., Liu, W., Peng, Z., Wang, J., Xue, Q., & Zuo, H. (2025). Development and Application Prospects of Biomass-Based Organic Binders for Pellets Compared with Bentonite. *Materials*, 18(19), 4553. <https://doi.org/10.3390/MA18194553>

Mars Mineral. (2024). *The Role of Pelletized Biochar in Advancing the Circular Economy*.

Neto, M. A. (2025). Transitioning to a circular economy: The future we cannot afford to delay | UNDP Climate Promise. Retrieved December 24, 2025, from <https://climatepromise.undp.org/news->

and-stories/transitioning-circular-economy-future-we-cannot-afford-delay

Onyenwoke, C., Tabil, L. G., Dumonceaux, T., Mupondwa, E., Cree, D., Li, X., & Onu Olughu, O. (2024). Technoeconomic Analysis of Torrefaction and Steam Explosion Pretreatment Prior to Pelletization of Selected Biomass. *Energies*, 17(1), 133. <https://doi.org/10.3390/EN17010133/S1>

Propellets Africa. (2025). Pellet Quality. Retrieved December 24, 2025, from <https://propellets.africa/pellet-quality/>

Retech Machinery. (2025). What Types of Plastics Are Suitable for Pelletizing. Retrieved December 24, 2025, from <https://www.retechmachine.com/news/what-types-of-plastics-are-suitable-for-pelletizing.html>

Rinke Engineering. (2023). Torrefactions vs. Steam Exploded in Biomass. Retrieved December 24, 2025, from <https://www.rinke-engineering.de/torrefactions-vs-steam-exploded/>

TSE. (2022). TS EN ISO 17225-2 / Eylül 2021 Muayene ve Deney Raporu. Retrieved December 24, 2025, from https://crkpellet.com/wp-content/uploads/2024/05/TS-EN-ISO-17225-2-DRF.-1_compressed.pdf

UDMachine. (2024). Understanding the Pelletizing Process: Techniques, Benefits, and Applications. Retrieved December 24, 2025, from <https://ud-machine.com/blog/what-is-the-pelletizing-technique/>

University of Kentucky. (2025). Lignite Coal, Kentucky Geological Survey. Retrieved December 24, 2025, from <https://www.uky.edu/KGS/coal/coal-lignite.php>

UseWoodFuel. (2018). Wood Pellets. Retrieved December 24, 2025, from

<https://www.usewoodfuel.org.nz/documents/resource/Technical-Guides/TG01-Revision-Section10-TG1-pellets-180122.pdf>

Wikipedia. (2025a). Catalysis. Retrieved December 24, 2025, from <https://en.wikipedia.org/wiki/Catalysis>

Wikipedia. (2025b). Lignite. Retrieved December 24, 2025, from <https://en.wikipedia.org/wiki/Lignite>

Wikipedia. (2025c). Pellet fuel. Retrieved December 24, 2025, from https://en.wikipedia.org/wiki/Pellet_fuel

Wikipedia. (2025d). Pelletizing. Retrieved December 24, 2025, from <https://en.wikipedia.org/wiki/Pelletizing>

Yemtar. (2025). History of Pellet Mills in Feed Industry. Retrieved December 24, 2025, from <https://www.yemtar.com/en/blog/history-of-pellet-mills-in-feed-industry>

Zhao, H., Zhou, F., Ma, C., Wei, Z., & Long, W. (2022). Bonding Mechanism and Process Characteristics of Special Polymers Applied in Pelletizing Binders. *Coatings 2022, Vol. 12, Page 1618, 12(11), 1618.* <https://doi.org/10.3390/COATINGS12111618>

Fundamentals of Pellet Manufacturing Process

Introduction

Pelletization is the process of converting particulate feedstocks with low bulk density into high-density products of standardized geometric form through a combined application of mechanical pressure, heat, and moisture. Referred to in the industrial literature as “densification,” this process is employed to optimize a material’s transportability, storage efficiency, and energy/nutrient density (Loyal Machine, 2024; World Bioenergy Association, 2014; Yemmak, 2025). First developed in the United States in the 1930s for animal feed production, the technology entered the biomass sector in the 1950s through the valorization of sawmill residues and, following the global energy crises of the 1970s, became an indispensable component of the renewable energy industry (Gemco Energy, 2025a; World Bioenergy Association, 2014). Today, pelletization is no longer a simple compaction operation; rather, it is a multidisciplinary engineering discipline integrating complex pressing kinematics, advanced materials science, and precisely controlled hydrothermal conditioning processes.

Classical Design Architectures in Pellet Machines

Pelletization equipment is primarily classified according to (i) the die configuration through which the material is forced and (ii) the arrangement of rollers that drive the material into the die. Two principal architectures are widely accepted in industry: Flat-Die and

Ring-Die pellet mills (Güneş & Çelik, 2017). Although both systems operate on the principle of compacting material within die apertures against frictional resistance, they exhibit pronounced differences in mechanical efficiency, capacity, and feedstock adaptability (Kmec Engineering, 2024).

Flat-Die Pellet Mills

The flat-die architecture represents the most fundamental and historically the oldest form of pelletization technology. Typically preferred for low- to medium-scale production capacities (80 kg/h to 1,000 kg/h), these machines are distinguished by their compact footprint and operational flexibility (Huang, 2014). In this design, a horizontal disc (die) with vertical perforations is coupled with rollers that traverse the die surface (Çelik, 2024).

Flat-die machines are commonly divided into two subtypes based on their motion scheme:

1. R-Type (Rotating Rollers): In this configuration, the die remains stationary while the rollers rotate over the die surface to compact the material. R-type machines provide higher torque and improved stability in processing dense biomass feedstocks (e.g., oak and pine sawdust) (Zhu, 2013).

2. D-Type (Rotating Die): The rollers are mounted on a fixed shaft, while the flat die itself rotates. This design is simpler and more cost-effective, and is generally suitable for soft feed rations or hobby-scale applications.

A key structural advantage of flat-die machines is that feeding can be performed vertically with assistance from gravity. The material drops directly into the pressing chamber and is distributed relatively uniformly across the die surface by the rollers (flatdiepelletmill.com, 2025a; pellet-machine.net, 2025; wood-

pellet-mill.com, 2025). Moreover, the roller–die gap can typically be adjusted via a central set screw often even during operation allowing straightforward optimization when processing materials with variable moisture or heterogeneous particle-size distributions. However, due to the inherent geometry of flat dies, the die’s tangential (circumferential) surface speed varies with radius ($v = \omega r$). This radial surface-speed gradient can lead to non-uniform slip, frictional heating, and contact pressure distribution, which in turn may cause non-uniform wear on the die surface. Figure 1 below shows an example of flat die pellet mill.

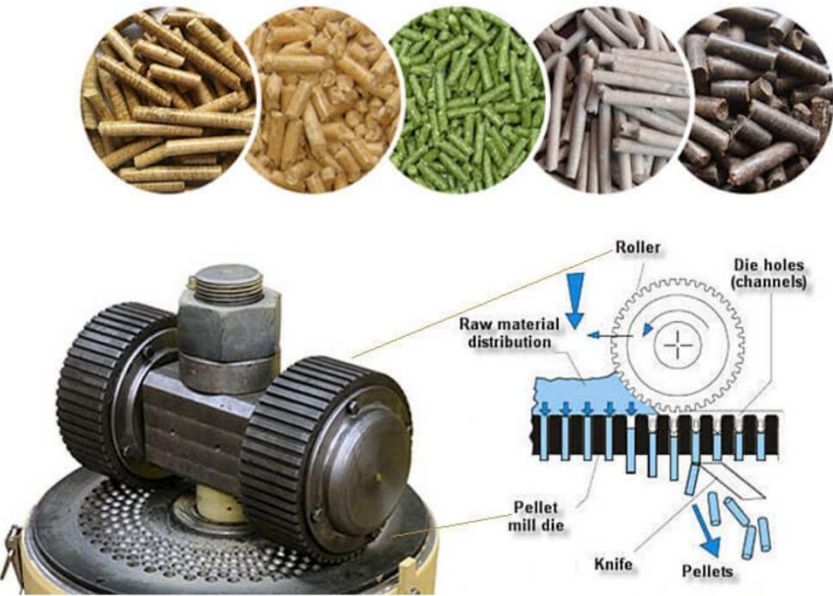


Figure 1: Flat Die Pellet Mill

Reference: flatdiepelletmill.com, 2025b

Ring-Die Pellet Mills

Ring-die machines are the standard equipment of modern industrial facilities, particularly high-capacity feed mills and large-scale energy pellet production lines. Approximately 95% of

industrial pellet presses worldwide employ this system. In this architecture, a cylindrical ring die rotates about a vertical or horizontal axis, while two or three rollers located along the inner circumference rotate due to frictional contact. Figure 2 below shows an example of ring die pellet mill.

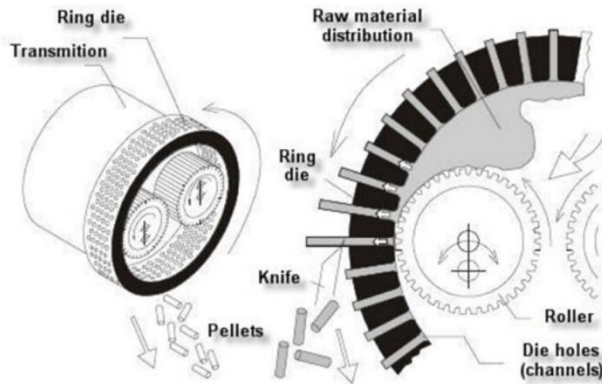


Figure 2: Ring Die Pellet Mill

Reference: Huang, J., 2014

Ring-die machines can operate at high peripheral velocities (6–10 m/s), making them well-suited for continuous, high-throughput production (Poultry Trends, 2025; Turner, 2019). In these machines, the material is distributed across the die surface via centrifugal forces and mechanical scrapers. As the material enters the narrow nip region between the rollers and the die, substantial radial pressure is generated, forcing the material outward through the die channels (Matúš, Križan, Beniak, & Strigáč, 2022).

Ring-die systems generally employ two main drive mechanisms:

- **Gear-Driven:** Motor power is transmitted to the die via a gearbox. These systems can transfer approximately 96–98% of the

motor load and offer high energy efficiency in heavy-duty applications.

- **Belt-Driven:** V-belts or timing belts are used. They operate more quietly and can damp mechanical shocks; however, their efficiency typically ranges from ~90–96%, depending on maintenance condition (Turner, 2019).

Table 1 below compares Flat-Die and Ring-Die systems.

Table 1: Comparison of Flat-Die and Ring-Die

Parameter	Flat-Die	Ring-Die
Capacity Range	80–1,000 kg/h	0.5–30+ t/h
Feeding Mechanism	Gravity-fed (vertical flow)	Forced feed / scraper-assisted (horizontal flow)
Pressure Control	Manual/hydraulic (high flexibility)	Typically fixed (low flexibility)
Wear Pattern	Non-uniform due to differential speed	Uniform due to constant peripheral speed
Energy Efficiency	High at small scale	Lower specific energy consumption (kWh/ton) at large scale
Maintenance Complexity	Low (compact, lightweight parts)	High (heavy die; lifting/hoisting required)

Pressing Kinematics and Theoretical Pressure Modeling

Pelletization is fundamentally governed by the densification of particles as they overcome frictional resistance within the press channel. The performance and stability of this process can be analyzed through kinematic and dynamic models that describe the feedstock’s mechanical behavior.

Pressure Distribution Within the Press Channel

Material entering the die channel exerts radial pressure on the channel walls. This pressure produces frictional resistance that

increases exponentially with channel length. A mathematical model defining the steady-state pelletization pressure (P_x) is given as follows (Stelte et al., 2011; Öden & Çelik, 2022):

$$P_x = \frac{P_{N0}}{\nu_{LR}} P_{N0} (e^{4\mu\nu_{LR}c} - 1)$$

In this model, the critical variables directly affect pellet quality:

- Compression Ratio (c): Defined as the ratio of channel length (L) to diameter (D), i.e., L/D . As this ratio increases, the material's residence time in the channel and the frictional exposure both rise, which enhances pellet durability; however, it also increases energy consumption in a non-linear manner (Grains.org, 2018; Verhoven & Thomas, 2025).

- Coefficient of Friction (μ): Represents the interaction between the material and the steel die surface. With increasing temperature particularly as resins and oils present in biomass are released this coefficient decreases, creating a natural lubricating effect (Tumuluru, Conner, & Hoover, 2016).

- Poisson's Ratio (ν_{LR}): Describes the tendency of the material to expand radially under axial compression.

Studies indicate that exceeding a pelletization pressure threshold of 200–250 MPa does not yield a meaningful increase in pellet density, but instead increases mechanical stress and energy waste (Stelte et al., 2011).

The Nip Zone and Material Flow Dynamics

The narrow contact region between the roller and the die is referred to as the nip zone. The kinematic phenomena in this region occur in two stages:

1. Compaction Stage: The roller compresses the material layer on the die (pad thickness), expels entrapped air, and densifies the feedstock.

2. Extrusion Stage: The densified material is forced into the die channels under the vertical force applied by the roller.

The nip angle governs the roller's ability to capture and draw in the material. Larger-diameter rollers provide a smaller nip angle, which prevents the material from being "rejected" by the roller (slippage) and enables the processing of thicker material beds (JohnPac, 2019). If the feed rate is excessively high relative to roller speed, the material accumulates in front of the roller instead of entering the die holes; this increases slippage forces and may cause die plugging. Figure 3 below shows a die and roller nip points for three-roll and two-roll applications.

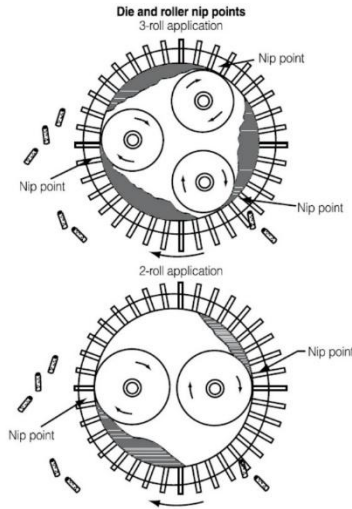


Figure 3: Die and roller nip points for three-roll and two-roll applications.

Reference: Turner, R., 2019

Feeding Systems: Flow Control and Stability

One of the most critical determinants of pellet mill performance is controlling the mass flow rate of material delivered to the press chamber. Irregular feeding leads to motor overloads, fluctuations in pellet quality, and mechanical failures (Afrimash.com, 2025). Figure 4 illustrates the effect of doubling the feed rate, which results in a feed bed (material pad) ahead of the roll that is approximately twice as thick. Under this thicker bed condition, the roll is more likely to drive the material forward along the die surface rather than forcing it downward into the die holes. The resulting slip force promotes sliding of the feed bed across the die face, which can ultimately lead to hole blockage and die choking.

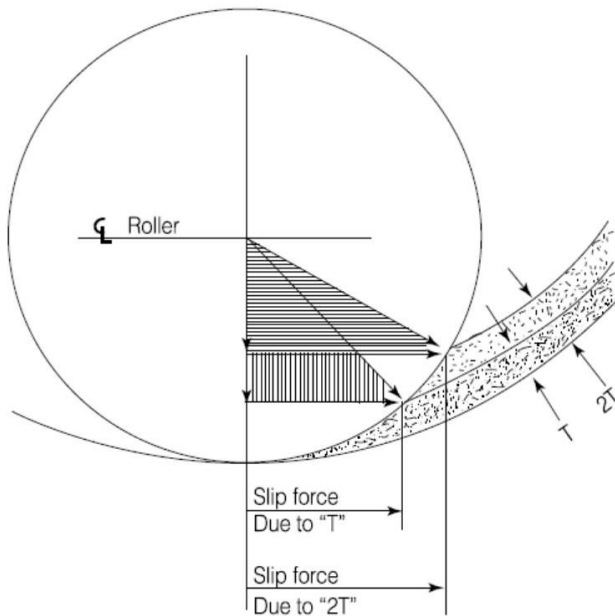


Figure 4: Feed Rate vs Roll Force.

Reference: Turner, R., 2019

Screw Feeders

Screw feeders convey material from the hopper to the conditioner. Unlike standard conveyors, pellet feeders typically operate under a flood-loaded inlet principle. Their design must incorporate features that prevent bridging in the hopper.

To improve feeding precision, the following design approaches are used:

- **Progressive Pitch Screw (Variable Pitch):** Increasing the screw pitch from inlet to outlet ensures uniform withdrawal of material across the hopper floor (Carson & Petro, 2022; Screw Conveyor Bega, 2025; smt-site.com, 2023).

- **VFD (Variable Frequency Drive):** The feed rate is dynamically adjusted based on the pellet press main motor current (amperage). This enables continuous operation at maximum efficiency (Abc Machinery, 2025b; Campabadal, Maier, & Jones, 2019; XueZao Machinery, 2025).

Force Feeders

In processing low-density, lightweight materials such as wood sawdust, straw, or rice husk gravity-based feeding may be insufficient. In such cases, force-feeding (imperative/force feeding) systems are used to push the material into the press chamber mechanically (pellet-richi.com, 2020). By minimizing air voids within the press chamber, these systems increase die fill and can raise production capacity by 15–20%.

Conditioning Units and Hydrothermal Activation

Conditioning is widely regarded as the “heart” of pelletization. Approximately 20% of pellet quality and a substantial portion of operational efficiency are determined in this step.

Conditioning is the controlled addition of heat and moisture typically in the form of saturated steam to the raw material.

Steam and Thermodynamic Effects

Steam injection induces two critical transformations in the material:

1. **Sensible Heat Transfer:** Before condensation, steam increases the material temperature.

2. **Latent Heat and Moisture Transfer:** Upon condensation, steam releases a large amount of energy and increases material moisture. As a general rule, every 12.5°C temperature increase adds approximately 1% moisture to the material (Dunmire, Charles, & Chad, 2021).

The outcomes of these hydrothermal changes include:

- **Starch Gelatinization:** In the feed industry, starch molecules are disrupted and become an effective natural binder. This increases pellet durability (PDI—Pellet Durability Index) while also improving digestibility for animals (Devenish.com, 2025; tekpro.com, 2025).

- **Lignin Softening:** In biomass production, lignin—the natural polymer in wood—begins to soften around 80°C (glass transition). Softened lignin forms a thermoplastic bond between particles and prevents pellet disintegration after cooling (Ismail, Khor, & Mohamed, 2023).

- **Lubrication Effect:** Temperature and moisture reduce material viscosity and decrease friction within the die channels. This lowers specific energy consumption (kWh/ton) and extends die life.

Conditioning Parameters and Optimization

Material behavior within the conditioner is governed by the paddles' angle and rotational speed.

- **Residence Time:** The duration for which the material interacts with steam. While 30–45 seconds is sufficient for standard rations, this can be increased to 90–120 seconds for high-fiber feeds or feeds requiring stringent hygiene (e.g., Salmonella control).

- **Mold Hole Entry Angle:** As entry angle is increased from 45° toward 90°, the forward movement of the material slows and residence time increases. This tends to improve pellet quality in an approximately linear manner (Briggs, Maier, Watkins, & Behnke, 1999; Gilpin, Herrman, Behnke, & Fairchild, 2002).

Table 2 below presents The Effect of Conditioning Parameters on Pellet Quality.

Table 2: The Effect of Conditioning Parameters on Pellet Quality

Conditioning Parameter	Ideal Value / Range	Effect on Pellet Quality
Steam Quality	≥97% saturated steam	Ensures uniform distribution of heat and moisture.
Target Temperature	80–95 °C	Critical for activation of lignin and starch.
Added Moisture	4–6%	Improves binding, reduces friction.
Conditioner Speed	90–500 RPM	Determines mixing intensity.

Material Specifications and Engineering Requirements

The design and operational settings of pellet mills vary substantially as a function of the chemical and physical nature of the processed material.

Biomass and Wood Pelletization Dynamics

In biomass pelletization, the primary challenge is the feedstock's high lignocellulosic content and abrasiveness.

- **Wood Sawdust:** Softwoods (e.g., pine) pelletize more readily due to their inherent resin content, whereas hardwoods (e.g., oak, beech) may require higher compaction pressures and dies with lower L/D ratios (Fabon Engineering, 2025; Gemco Energy, 2025b).
- **Agricultural Residues (Straw, Rice Husk):** These materials exhibit very high silica contents. In rice husk, silica levels of 15–20% accelerate abrasive wear of dies and rollers (Richi Machinery, 2025). Moreover, materials such as straw have low bulk density and cannot be processed efficiently without force-feeding units.

Compound Feed and Aquatic Feed

In the feed industry, pelletization is commonly treated as a thermal “cooking” process.

- **Compound Feeds:** Corn- and soybean-based rations are rich in starch and typically yield high-quality pellets at standard L/D ratios (8–12).
- **Aquatic Feed:** Fish feeds must remain stable in water for extended periods without disintegration. Consequently, two- or three-stage jacketed conditioners are used to target “cooking” (gelatinization) levels above 95%.

Lubrication Strategies

Pellet mills operate under some of the most demanding tribological conditions among industrial machines. Press-chamber temperatures can reach 110°C, and bearings are continuously subjected to radial loads on the order of thousands of tonnes (Lubrication Engineers, 2025).

Design of Automatic Lubrication Systems

Manual lubrication often creates an “all-or-nothing” scenario that reduces bearing life. In modern pellet presses, the following automatic lubrication architectures are widely used:

- **Progressive Systems:** Lubricant is distributed sequentially from a main line to all lubrication points. If a single point becomes blocked, system pressure rises and the main control unit shuts down the machine to prevent bearing damage.
- **Dual-Line Systems:** Used in very long plant lines and systems with many lubrication points to prevent pressure losses.

Due to food safety requirements, lubricants used in feed production must be certified as H1 food-grade and must be resistant to oxidation at elevated temperatures (Gpreeves.com, 2024; Mitchell, 2025; SKF, 2025).

Wear and Failure Analysis

Die and roller wear constitute one of the largest cost components in pellet production. Dies are typically manufactured from high-alloy stainless steels (e.g., X46Cr13) and hardened under vacuum conditions (Abc Machinery, 2025a). Table 3 below shows some types of failures and solution approaches.

Table 3: Types of Failures and Solution Approaches

Failure Mode	Possible Cause	Corrective Approach
Low Throughput	Die holes clogged or worn	Run-in/condition the die using oily sand, or replace the die
Excessive Vibration	Roller–die gap imbalance or bearing damage	Inspect bearings and set the gap to 0.1–0.3 mm
Brittle Pellets	Inadequate conditioning or low binder content	Increase steam addition or use a thicker die
Motor Overload	Overfeeding or excessively high compression ratio	Reduce feed rate (via VFD) or revise die specification

Industrial Implications and Forward Outlook

Pelletization technology represents a critical engineering domain positioned at the intersection of the global energy transition and sustainable agricultural policy. The analysis presented in this report demonstrates that pellet production is not a simple mechanical compaction task; rather, it is a precise process in which the thermodynamic properties of the feedstock are synchronized with machine kinematics.

While ring-die architectures maintain dominance at industrial scale due to their advantages in energy efficiency and throughput, flat-die designs continue to occupy an indispensable niche in flexible and localized production solutions. Future pelletization systems are expected to evolve toward the concept of “Smart Pelleting.” In this context, real-time moisture sensors, AI-driven feeding algorithms, and autonomous lubrication systems will reduce production costs by minimizing human error. In addition, specially alloyed dies developed for challenging agricultural residues and advanced hydrothermal conditioning techniques will directly strengthen the circular economy. Pelletization will remain one of modern engineering’s most tangible achievements in converting wastes into high-value energy and nutrient resources.

References

Abc Machinery. (2025). Ring Die Feed Pellet Mill Machine for Animal Food Processing. Retrieved December 24, 2025, from <https://www.feedmillplant.com/feed-plant-machinery/ring-die-pellet-mill.html>

Afrimash.com. (2025). Top 5 Mistakes Farmers Make When Using Pelleting Machines. Retrieved December 24, 2025, from <https://afrimash.com/top-5-mistakes-farmers-make-when-using-pelleting-mach/>

Campabadal, C. A., Maier, D. E., & Jones, C. (2019). Steam generation, control, and quality for feed manufacturing. Retrieved December 24, 2025, from https://img.feedstrategy.com/files/base/wattglobalmedia/all/document/2019/09/fs.2-8_Steam_Generation_Control_and_Quality.pdf

Carson, J. W., & Petro, G. (2022). How to Design Efficient and Reliable Feeders for Bulk Solids. Retrieved December 24, 2025, from <https://img.chemicalprocessing.com/files/base/ebm/chemicalprocessing/document/2022/08/1661893638979-designefficientfeeders.pdf>

Çelik, İ. (2024). Briket/pelet pres teknolojileri üzerinde genel değerlendirme. In *Elektronik, makine, harita, programlama, muhasebe ve otomotiv alanlarındaki gelişmeler üzerine çalışmalar* (Vol. 1, pp. 1–10). İstanbul: Filiz Kitabevi.

flatdiepelletmill.com. (2025a). Flat Die Pellet Mill Superior to Ring Die Pellet Mill. Retrieved December 24, 2025, from <https://www.flatdiepelletmill.com/flat-die-pellet-mill-superiorities/>

flatdiepelletmill.com. (2025b). How Does a Household Pellet Mill Work? Retrieved December 24, 2025, from <https://www.flatdiepelletmill.com/household-pellet-mill-work>

Gemco Energy. (2025). Differences between flat die and ring die pellet mill. Retrieved December 21, 2025, from <http://www.gemcopelletmills.com/pellet-mill-difference.html>

Grains.org. (2018). Chapter 19 - Pelleting DDGS Diets for Poultry. Retrieved December 24, 2025, from <https://grains.org/wp-content/uploads/2018/06/Chapter-19.pdf>

Güneş, E. C., & Çelik, I. (2017). Use of disc springs in a pellet fuel machine for pressure regulation and prevention of damage. *Acta Polytechnica*, 57(2), 89–96. <https://doi.org/10.14311/AP.2017.57.0089>

Huang, J. (2014). Flat Die Pellet Mill And Ring Die Pellet Mill comparison. Retrieved December 24, 2025, from <https://www.biofuelmachines.com/Flat-Die-And-Ring-Die-Pellet-Mills-Comparison.html>

JohnPac. (2019). How Pelleting Influences Particle Size In Animal Feed. Retrieved December 24, 2025, from <https://www.johnpac.com/food-for-thought-how-pelleting-influences-particle-size-in-animal-feed/>

Kmec Engineering. (2024). Differences between ring die pellet mill and flat die pellet mill. Retrieved December 24, 2025, from <https://www.biomasspelletplant.com/news/differences-between-ring-die-and-flat-die.html>

Loyal Machine. (2024). Choosing the best pelletizer machine: a comprehensive guide to making pellets. Retrieved December 21, 2025, from <https://loyal-machine.com/blog/pelletizer-machine/>

Matúš, M., Križan, P., Beniák, J., & Strigáč, S. (2022). Pelleting dies – design, material, geometry of pressing channels.

World Journal of Advanced Engineering Technology and Sciences, 7(2), 287–295. <https://doi.org/10.30574/WJAETS.2022.7.2.0181>

Öden, S., & Çelik, İ. (2022). Yakıt pelet presleri ile pelet üretimi sırasında karşılaşılan sorunlar, tasarım ve imalat iyileştirmeleri ile önerilen çözümler. *Ankara International Congress on Scientific Research - VII*, 1086–1099.

pellet-machine.net. (2025). Ring Die or Flat Die? How to Choose An Ideal Pellet Mill? Retrieved December 24, 2025, from <https://www.pellet-machine.net/news/how-to-choose-an-ideal-pellet-mill/>

Poultry Trends. (2025). Pellet Mill Design: Important Aspects. Retrieved December 24, 2025, from <https://www.poultrytrends.in/pellet-mill-design-important-aspects/>

Screw Conveyor Bega. (2025). What is Screw Feeder (Mass Flow & Bottom Live). Retrieved December 24, 2025, from <https://www.screwconveyorbega.com/what-is-screw-feeder>

smts.com. (2023). Screw Feeder Design for Metering Bulk Materials. Retrieved December 24, 2025, from <https://www.smts.com/resources/screw-feeder-design-for-metering-bulk-materials.html>

Stelte, W., Holm, J. K., Sanadi, A. R., Barsberg, S., Ahrenfeldt, J., & Henriksen, U. B. (2011). Fuel pellets from biomass: The importance of the pelletizing pressure and its dependency on the processing conditions. *Fuel*, 90(11), 3285–3290. <https://doi.org/10.1016/j.fuel.2011.05.011>

Tumuluru, J. S., Conner, C. C., & Hoover, A. N. (2016). Method to Produce Durable Pellets at Lower Energy Consumption Using High Moisture Corn Stover and a Corn Starch Binder in a Flat

Die Pellet Mill. *Journal of Visualized Experiments: JoVE*, 2016(112), 54092. <https://doi.org/10.3791/54092>

Turner, R. (2019). Pellet mill design - Feed Pelleting Consultant - Kansas State University. Retrieved December 24, 2025, from https://img.feedstrategy.com/files/base/wattglobalmedia/all/document/2019/09/fs.1-3_Pellet_Mill_Design.pdf

Verhoven, M., & Thomas, M. (2025). How does processing affect pellet quality? Phileo by Lesaffre. Retrieved December 24, 2025, from <https://phileo-lesaffre.com/en/how-does-processing-affect-pellet-quality/>

wood-pellet-mill.com. (2025). Ring Die Wood Pellet Mill or Flat Die Wood Pellet Mill. Retrieved December 24, 2025, from <https://www.wood-pellet-mill.com/application/ring-die-or-flat-die.html>

World Bioenergy Association. (2014). Pellets – a fast growing energy carrier. Retrieved December 21, 2025, from <https://www.worldbioenergy.org/uploads/Factsheet%20-%20Pellets.pdf>

XueZao Machinery. (2025). Ring Die Feed Pellet Machine | Large Animal Feed Pellet Mill. Retrieved December 24, 2025, from <https://imachiney.com/products/feed-machine/ring-die-feed-pellet-machine/>

Yemmak. (2025). Yem üretiminde peletleme prosesi. Retrieved December 21, 2025, from <https://www.yemmak.com/tr/yem-uretiminde-peletleme-prosesi>

Zhu, L. (2013). Pellet Mill Repair: Flat Die Versus Ring Die. Retrieved December 24, 2025, from <https://ethanolproducer.com/articles/pellet-mill-repair-flat-die-versus-ring-die-8492>

Drive Systems and Maintenance Strategies For Pelletizing Machines

Introduction

In the modern industrial production ecosystem, pelletization technology is a critical process that enhances logistics, storage, and end-use efficiency by optimizing the mechanical properties of bulk feedstocks. Pellet machines employed in strategic sectors such as agriculture, livestock production, biomass energy, and metallurgy densify dusty or fine-particulate solid materials by compacting them under high pressure and controlled temperature, thereby imparting a defined profile and density (ud-machine.com, 2024; Yemsa Makina, 2025). This transformation is not merely a simple pressing operation; rather, it constitutes a complex synthesis of mechanical design, materials science, and tribological interactions. The efficiency of a pelletization system depends directly on the extent to which the energy generated by the motor is converted into useful work within the narrow clearance between the die and the rollers. In this context, parameters such as the torque characteristic of the drive system, the mechanical efficiency of power-transmission components, metallurgical wear resistance, and surface roughness are fundamental determinants of production-line profitability (Gemco Energy, 2025c; Yuda Machinery, 2023).

Structurally, pellet machines consist of a few fundamental components, such as the feeder, conditioner, the die with cutting

mechanism, coupling and the motor together with the power-transmission system. Figure 1 below shows a schematic structural view of biomass ring type pellet machine.

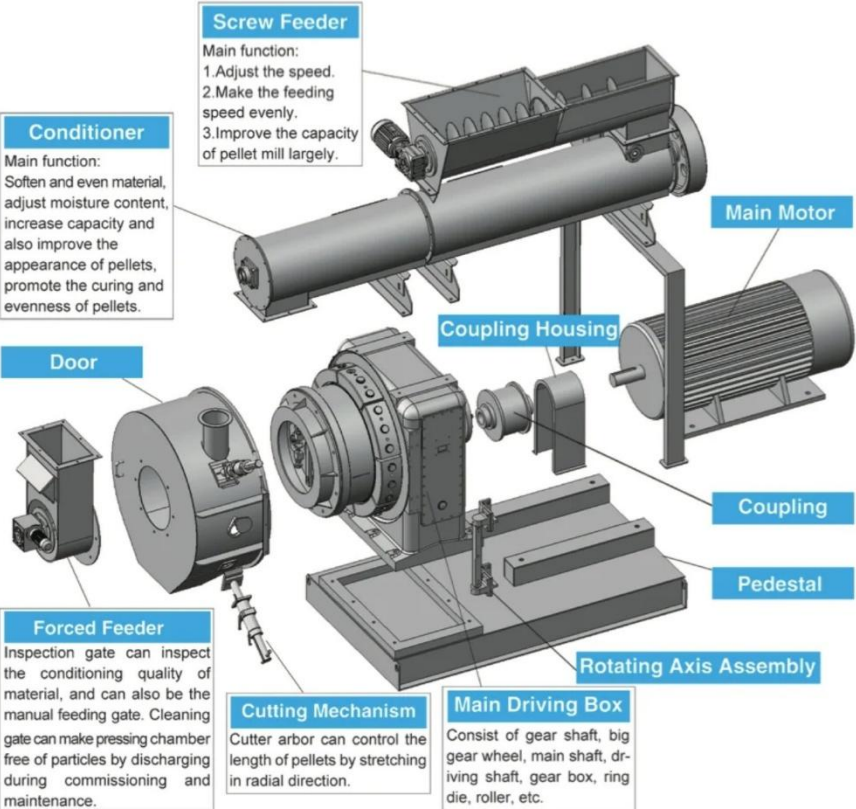


Figure 1: A Schematic Structural View of Biomass Pellet Machine (R Type)

Reference: Hengmu Machine, 2025

The synchronized operation of these components directly influences pellet quality. In particular, in applications processing high-resistance materials such as biomass and wood pelletization machines are exposed to substantial mechanical stresses and thermal fluctuations. These demanding conditions necessitate that

maintenance engineering adopt predictive and preventive paradigms rather than a purely reactive approach. From lubrication management and spare-parts strategy to bearing failure analysis and die/roller refurbishment operations, each stage must be configured to optimize the facility's total cost of ownership (TCO) (Streetz, 2024; Verdantis, 2025).

Drive Systems and Power-Transmission Architecture: Efficiency and Torque Dynamics

In pellet machines, the drive system is the mechanical “heart” that converts the rotational motion of the main motor into the high-torque compressive force applied in the pelletizing chamber. The design of these systems exerts a decisive influence on energy consumption, maintenance requirements, and operational stability. Within industry, belt–pulley mechanisms, gearbox systems, and modern direct-drive technologies are widely utilized.

Comparative Analysis of Belt and Gear Drive Systems

Belt–pulley systems, commonly preferred in conventional pellet mills, are recognized for their low initial capital cost, ease of spare-part procurement, and ability to dampen operational noise. However, the mechanical efficiency of belt-driven systems decreases under high load due to the risk of slippage. Belt slippage not only results in energy losses but also induces undesirable radial loads on the shaft and increases thermal buildup. Particularly when processing materials with high frictional resistance such as wood sawdust or agricultural residues the torque-transmission capacity of belt-driven systems can become a limiting factor.

Gear-driven systems, by contrast, transmit motor power to the main shaft directly and at a fixed ratio. This architecture provides higher mechanical efficiency and greater torque-transmission capability than belt-driven systems. In the pelletization of hard and

abrasive materials, gear systems help preserve product quality by ensuring stable rotational speed and high compressive force (onecpm.com, 2025; Scribd.com, 2025). Nevertheless, gearboxes require precise alignment, regular oil replacement, and comparatively complex maintenance procedures. To reduce mechanical losses, modern designs increasingly employ two-stage power-transmission systems, aiming to achieve quieter, lower-vibration operation (feedtech.com.tr, 2025). Table 1 below provides a comparison of Belt Drive, Gear Drive, and Direct Drive.

Table 1: Comparison of Belt Drive, Gear Drive and Direct Drive

Parameter	Belt Drive	Gear Drive	Direct Drive
Energy Efficiency	90–96% (losses due to slip)	96–98% (gear friction losses)	98%+ (no transmission losses)
Torque Capacity	Medium (risk of slip under heavy load)	High (fixed transmission ratio)	Very high
Maintenance Requirement	Frequent (belt tensioning and replacement)	Moderate (lubrication and alignment)	Low (reduced mechanical components)
Noise Level	Low (inherent damping)	Medium/high (metal-to-metal contact)	Very low (vibration control)
Speed Control	Limited (requires pulley diameter changes)	Stepped/variable (supported via VSD)	Stepless (full control over 0–8 m/s)

Direct Drive Technology and Its Operational Advantages

Direct-drive pellet mills, developed in response to the biomass sector’s high-torque and low-speed requirements, eliminate intermediate transmission elements such as gearboxes and V-belts entirely. In these systems, a high-pole torque motor is coupled directly to the main shaft. Compared with conventional

architectures, direct-drive designs can deliver energy savings of up to 20%. The principal source of this saving is the minimization of mechanical friction points along the transmission chain and the motor's synchronized operation directly with the load.

The most distinctive technical advantage of direct-drive systems is the availability of full torque from zero speed. This capability enables smooth start-up even when the machine is fully charged with feedstock (onecpm.com, 2025; Weima, 2025). Furthermore, the ability to adjust die speed continuously between 3 and 8 m/s without torque loss allows the optimal densification profile to be defined for different feedstock formulations. Precise speed control has a direct positive effect on the Pellet Durability Index (PDI), reducing fines generation and standardizing product quality. The reduced number of mechanical components also lowers maintenance costs and decreases the machine's overall footprint, improving space efficiency at the plant level.

Tribology and Wear Mechanisms: Metallurgical and Geometric Interactions

By its nature, pelletization involves severe friction and wear phenomena. Forcing feedstock through die channels under high pressure induces both chemical corrosion and mechanical erosion (Turner, 2019; ubts.net, 2025). Wear management is therefore foundational to operational sustainability in pellet plants.

Die Metallurgy and Material Selection Criteria

Alloys used in die manufacturing must maintain a delicate balance among hardness, toughness, and corrosion resistance. Two elements are particularly determinant in material selection: carbon and chromium. Carbon content governs the hardness achieved after heat treatment and, accordingly, the resistance to abrasive wear.

Chromium, in turn, enhances resistance to oxidation and corrosive agents.

Steels containing more than 12% chromium fall into the stainless-steel category and are preferred particularly in facilities processing acidic feedstocks or high-moisture materials. “Chrome-Plus” stainless steels provide the most durable solution for highly abrasive biomass constituents, offering superior resistance to pitting and die-hole enlargement.

Heat-treatment routes directly determine die service life. Carburized (case-hardened) dies provide extreme surface hardness while preserving core toughness, thereby improving fracture resistance. However, because these dies are initially rougher at the surface, they require a break-in period before full-capacity operation is achieved. Through-hardened (neutral-hardened) dies, by contrast, enable easier start-up; yet, more pronounced declines in pellet quality may occur toward the end of their service life.

Compression Ratio and Channel Geometry

The most critical engineering parameter governing pellet quality and production capacity is the compression ratio (CR). It is defined as the ratio of the effective length (L) of a die channel to the hole diameter (D).

The compression ratio determines the frictional resistance (back pressure) encountered by the material as it passes through the channel. Materials with low oil content and high dryness (e.g., rice husk) require specific ratios to avoid excessive resistance, whereas wood pellets typically demand substantially higher compression ratios. An excessively high ratio can cause die-hole plugging and machine shutdown due to overload, while an excessively low ratio leads to insufficient densification and pellet disintegration. Table 2 below presents the ideal compression ratio (CR) by material type.

Table 2: Ideal Compression Ratios (CR) by Material Type

Material Type	Ideal Compression Ratio (CR)	Observations
Rice Husk	6:1–8:1	Dry material; requires high frictional heat.
Wheat Straw	5.5:1–7:1	Low bulk density; moderate resistance.
Hardwood	8:1–12:1	High pressure is essential for lignin activation.
Softwood	Requires a thicker die (higher effective CR).	Demands greater compression than hardwood.

The internal geometry of die channels is not limited to a purely cylindrical structure. In modern die designs, conical chamfers at the inlet (taper inlet) or stepped/relieved inlet sections (well inlet) are commonly used (Matúš, Križan, Beniak, & Strigáč, 2022). These features increase pre-compaction at the channel entrance, improve energy efficiency, and reduce stress concentrations on the die surface (Söyler & Çelik, 2021; Wu, Shi, Ding, Peng, & Sun, 2010). Relief holes at the outlet, in turn, allow the targeted effective length (L) to be maintained without compromising the die’s structural integrity.

Surface Roughness and Friction Physics: The Performance–Quality Relationship

In pelletization, the internal surface roughness of die holes plays a decisive role in both energy consumption and the surface quality of the final product. The coefficient of friction (μ) is a direct function of surface morphology and governs the pellet’s resistance to movement within the channel (He et al., 2025; Salas-Bringas et al., 2010).

Effects of Ra on Friction and Energy

Surface roughness is typically expressed as Ra (arithmetic mean roughness). In high-quality dies manufactured via precision gun drilling (deep-hole drilling), internal hole roughness can be reduced to approximately 1.2 Ra (CPM, 2025; Gemco Energy, 2025a). Experimental studies confirm that each incremental increase in surface roughness increases the coefficient of friction and, consequently, raises the motor current draw (electrical power consumption).

Smoother surfaces enable material to flow through the holes with lower energy demand, thereby reducing specific energy consumption (SEC). However, if friction becomes excessively low, the critical heat required for pelletization may not be generated (i.e., the 80–100°C needed to reach lignin’s glass transition range). To maintain this balance, surface finish must be matched to the feedstock’s moisture level and oil content.

Another key finding in friction physics concerns the orientation of roughness. Longitudinal roughness can increase frictional resistance by up to 30% compared with transverse roughness. Within pelletization channels, microscopic roughness “grooves” aligned with the extrusion direction affect the material’s ability to “grip”; this can increase pellet density while simultaneously accelerating the die wear rate (Cordier et al., 2025; Salas-Bringas et al., 2010).

Effect of Surface Roughness on Product Quality

Pellet surface roughness is the combined outcome of feedstock particle size and die surface finish. Fine-particle feedstocks fill voids within the channel more effectively, producing smoother and more durable pellets. Smooth pellets generate fewer fines during handling and packaging, thereby improving end-user

satisfaction and, for energy applications, combustion efficiency (JD Ring Die, 2025; Sarkar, Ang, & Liew, 2013). Excessive die-surface wear or “rollover” (deformation/crushing at the die inlets) causes dimensional irregularities and surface cracking, reducing the Pellet Durability Index (PDI).

Maintenance Engineering and Predictive Maintenance Strategies

In high-torque, continuously operated systems such as pellet mills, maintenance strategy should shift from a reactive (post-failure) mode to a predictive (pre-failure) mode. Predictive maintenance (PdM) seeks to minimize unplanned downtime by monitoring equipment health via real-time data (DXP Quadna, 2025; Prometheus Group, 2025).

Vibration Analysis and Fault Diagnosis

Vibration analysis is among the most effective methods for detecting bearing wear, shaft misalignment, and imbalance in pellet mills. Each rotating component generates a characteristic frequency spectrum. Data collected by vibration sensors (accelerometers) are transformed into the frequency domain using Fast Fourier Transform (FFT) analysis.

- **Bearing Damage:** High-frequency “impact” signals indicate surface roughness or cracks in bearing raceways. Envelope analysis isolates these signals and quantifies fault severity.

- **Misalignment and Imbalance:** High-amplitude vibrations typically occurring at multiples of the motor rotational speed (RPM) indicate coupling misalignment or rotor imbalance.

- **Mechanical Looseness:** Irregular frequency responses indicate loosening of foundation bolts or bearing housings (EMS Industrial, 2025; vikinganalytics.se, 2025).

Facilities implementing predictive maintenance have reported 25–30% reductions in maintenance costs and 40–50% reductions in unplanned downtime. Large industrial operators such as General Motors have achieved savings of up to USD 20 million per year using vibration analysis alone across thousands of robots and rotating assets (WorkTrek, 2025).

Thermography and Motor Diagnostics

Infrared thermography is used to monitor the temperature distribution of die and roller bearings in the pelletizing chamber. Sudden increases above expected operating temperatures (80–100°C) indicate insufficient lubrication or excessive mechanical friction. In addition, motor circuit analysis (MCA) can detect insulation degradation, short circuits, or electrical imbalances in motor windings before catastrophic motor failure occurs.

Lubrication Management and Advanced Tribological Solutions

Lubrication is the most critical operational variable governing pellet mill service life. More than 70% of bearing failures result from insufficient lubrication, incorrect grease selection, or contamination (Castrol, 2025).

Ceramic-Based and Specialized Industrial Greases

High temperatures in the pelletizing chamber (which can reach up to 140°C) and intensive steam exposure can rapidly oxidize standard lithium-based greases and cause them to wash out of bearings. Under these severe conditions, calcium sulfonate complex or aluminum complex greases are recommended. These greases provide excellent water resistance and high dropping points (250°C+) (Lubriplate Lubricants, 2025; Valvoline, 2025).

Solid-lubricant–additized greases can, in some applications, reduce wear by promoting tribofilm formation under

boundary/mixed lubrication conditions. Field performance gains should be assessed in conjunction with contamination control, sealing integrity, and relubrication optimization; when addressed holistically, these measures can deliver meaningful reductions in grease consumption and measurable increases in bearing service life. Ultimately, the performance benefit is application-dependent and should be documented using controlled field data.

Bearing Failure Modes and Root Cause Failure Analysis (RCFA)

Bearings are among the most sensitive components of a pellet mill and inevitably experience fatigue due to the loads they carry. However, preventing premature failures requires accurate interpretation of damage patterns. Figure 2 below shows some example of bearing damages.



Figure 2: Some Example of Bearing Damages

Reference: Timken, 2019

Post-failure Root Cause Failure Analysis (RCFA) does not stop at replacing the failed component; rather, it identifies the underlying source of the problem (e.g., improper sealing design or an excitation source of vibration) in order to prevent recurrence. In particular, surface-initiated damage patterns such as Point Surface Origin (PSO) spalls are often indicative of lubricant contamination and implicitly signal that the filtration system requires improvement (NSK, 2014; Timken, 2019).

Table 3 below presents common bearing issues and their root causes.

Table 3: Common Bearing Issues and Their Root Causes

Failure Mode	Visual Symptom	Root Cause
Spalling / Pitting	Surface flaking; pieces of metal breaking away.	Material fatigue, overload, or shaft deflection/bending.
Abrasive Wear	Sandblasted or dull gray surface appearance.	Dust, sand, or metal particles entering past seals.
Adhesive Wear (Scuffing)	Metal transfer and burn marks on the surface.	Oil film breakdown, insufficient lubrication, or sudden load increase.
Fretting Corrosion	Rust-colored/black marks in the housing bore or on the shaft.	Microscopic oscillatory motion between the bearing and its seat.
Electrical Arc Fluting	Parallel grooves on the inner ring (“washboard” pattern).	Stray motor current passing through the bearing; inadequate grounding.

Die and Roller Reconditioning Technologies

Scrapping a worn die or roller constitutes a high-cost form of waste. Professional reconditioning practices extend component life and reduce the unit cost of pellets.

Die Restoration Process

Die reconditioning is a protocol involving precision engineering steps:

1. Diagnostic Inspection: Wear depth, ovality, and cracks on the die surface are assessed.

2. Hole Cleaning: Cemented feedstock residues inside the holes are removed using high-pressure water-jet systems at 15,000 psi.

3. Surface Grinding: The die face is skimmed using CNC grinding machines to eliminate waviness and to bring the roller contact surface into perfect parallelism.

4. CNC Countersinking: The conical entry angles at the hole inlets are re-machined. This reduces resistance during material entry, increases throughput, and provides energy savings (CFE Group, 2025).

5. Heat Treatment (If Required): Surface hardness is verified and, if necessary, re-hardened via induction.

Roller Reconditioning Process

Roller reconditioning typically includes complete replacement of bearings and seals, as well as refurbishment of the roller shell. Using 150-ton presses and specialized manipulators, this process is executed such that assembly tolerances and grease filling meet OEM standards (CFE Group, 2025). A reconditioned roller set is approximately 40–50% more economical than a new set and can deliver comparable service life.

Spare-Parts Strategy and Operational Inventory Management

In a pellet plant, spare-parts costs can reach up to 8% annually of total equipment maintenance expenditure (Agico Group,

2025; Gemco Energy, 2025b). To manage this financial burden, spare parts should be classified by criticality.

ABC–VED–FSN Analysis Matrix

In industrial inventory management, a three-dimensional matrix approach yields the most effective outcome:

- **ABC Analysis (Economic Value):**

Class A: High-cost items comprising 70–80% of total inventory value (e.g., main motor, large die assemblies). Managed with tight control and low safety stock.

Class B: The intermediate group between A and C.

Class C: Numerous but low-value items (bolts, seals). Procured in bulk (Gizaw & Jemal, 2021).

- **VED Analysis (Operational Risk):**

V (Vital): Parts whose absence halts production immediately and creates occupational safety risk (roller bearings, shear pins). Must be kept in stock.

E (Essential): Important; stockouts are undesirable, but short-term unavailability is typically tolerable (substitution or rapid procurement may be feasible). Moderate-to-high control with reasonable safety stock.

D (Desirable): Non-critical items that primarily improve efficiency or monitoring capability.

- **FSN Analysis (Movement Rate):**

Fast: Consumables such as roller shells replaced every 300–500 hours.

Slow: Main shafts or frame components that fail infrequently.

Non: Items showing no movement over a defined period (e.g., the last 6–12 months).

Supply Chain and Lead-Time Management

Lead times for custom dies can extend to several months depending on geography and specifications. Therefore, reorder point calculations should incorporate supplier lead time and an additional safety margin (safety stock) alongside average consumption rate (fsm.how, 2025; MDI, 2023). For critical components, avoiding dependence on a single supplier provides strategic resilience.

Conclusion and Future Prospects

The pursuit of efficiency in pelletization technologies is currently entering a new phase driven by digitalization and advanced materials science. The adoption of direct-drive technology in drive systems not only delivers energy savings but also reduces mechanical complexity, bringing the “maintenance-free machine” concept one step closer. From a tribological standpoint, ceramic-based intelligent lubrication solutions and nanotechnological control of surface morphology are extending die and roller lifetimes beyond conventional limits.

In the future, pellet machines will evolve into smart assets. Data collected from integrated vibration, temperature, and pressure sensors will be processed via AI algorithms, enabling predictions of Remaining Useful Life (RUL) with accuracy exceeding 90%. Surface roughness and channel-geometry optimizations will be simulated through machine-learning-enabled digital twins, facilitating die systems that can be dynamically adjusted for each feedstock type. This technological transformation will elevate pellet production from a mere densification operation into a hallmark of resource efficiency and operational excellence.

References

Agico Group. (2025). How to maintain dies and rollers of pellet mill. Retrieved December 24, 2025, from <http://www.ayimpex.com/FAQ/How-to-maintain-dies-and-rollers-of-pellet-mill.html>

Castrol. (2025). Bearing Failures and Troubleshooting. Retrieved December 24, 2025, from <https://thelubricantoracle.castrol.com/HPLguide/page-templates/troubleshooting/troubleshooting.html>

CFE Group. (2025). Compound Feed Engineering Die & Roll Refurbishment. Retrieved December 24, 2025, from <https://www.cfegroup.com/die-roll-refurbishment/>

Cordier, M., Diab, Y., Cavoret, J., Majdoub, F., Changenet, C., & Ville, F. (2025). An Experimental Study on the Impact of Roughness Orientation on the Friction Coefficient in EHL Contact. *Lubricants* 2025, Vol. 13, Page 340, 13(8), 340. <https://doi.org/10.3390/LUBRICANTS13080340>

CPM. (2025). Pellet Mill Parts & Accessories. Retrieved December 24, 2025, from <https://onecpm.com/pellet-mill-parts-and-accessories>

DXP Quadna. (2025). Vibration Analysis: A Critical Tool for Predictive Maintenance. Retrieved December 24, 2025, from <https://quadna.com/vibration-analysis-a-critical-tool-for-predictive-maintenance/>

EMS Industrial. (2025). Predictive Maintenance. Retrieved December 24, 2025, from <https://emsindustrial.com/preventative-maintenance/>

feedtech.com.tr. (2025). Pelet Presi - FeedTech. Retrieved December 24, 2025, from <https://www.feedtech.com.tr/tr/urunler/1010/peletleme/1029/pelet-presi.aspx>

fsm.how. (2025). Determining Optimal Spare Parts Inventory Levels and Safety Stock. Retrieved December 24, 2025, from <https://fsm.how/materials-management/determining-optimal-spare-parts-inventory/>

Gemco Energy. (2025a). How to maintain pellet mill die and roller? Retrieved December 24, 2025, from <https://www.pellet-making.com/blog/maintain-pellet-mill-die-and-roller.html>

Gemco Energy. (2025b). How to maintain the roller and die during the use of the pellet machine. Retrieved December 24, 2025, from <http://www.smallpelletmachines.com/news/How-to-maintain-the-roller-and-die.html>

Gemco Energy. (2025c). Study on Dies for Wood Pellet Machines. Retrieved December 24, 2025, from <https://www.pelletmillsolution.com/wp-content/uploads/Study-On-Dies-For-Wood-Pellet-Machines.pdf>

Gizaw, T., & Jemal, A. (2021). How is Information from ABC–VED–FNS Matrix Analysis Used to Improve Operational Efficiency of Pharmaceuticals Inventory Management? A Cross-Sectional Case Analysis. *Integrated Pharmacy Research & Practice*, 10, 65. <https://doi.org/10.2147/IPRP.S310716>

He, T., Chen, W., Liu, Z., Gong, Z., Du, S., & Zhang, Y. (2025). The Impact of Surface Roughness on the Friction and Wear Performance of GCr15 Bearing Steel. *Lubricants* 2025, Vol. 13, Page 187, 13(4), 187. <https://doi.org/10.3390/LUBRICANTS13040187>

Hengmu Machine. (2025). Horizontal Wood Pellet Mill for making EN A1 wood pellets. Retrieved December 24, 2025, from <https://pelletproject.cc/product/wood-pellet-mill-for-making-en-a1-wood-pellets-2/>

JD Ring Die. (2025). Optimizing Your Pellet Mill Die for Maximum Efficiency. Retrieved December 24, 2025, from <https://www.jdringdie.com/optimizing-your-pellet-mill-die-for-maximum-efficiency/>

Lubriplate Lubricants. (2025). Pellet Mill FG. Retrieved December 24, 2025, from <https://www.lubriplate.com/Products/Grease/Multi-Purpose-Greases/Pellet-Mill-FG/Pellet-Mill-FG>

Matúš, M., Križan, P., Beniak, J., & Strigáč, S. (2022). Pelleting dies – design, material, geometry of pressing channels. *Https://Wjaets.Com/Sites/Default/Files/WJAETS-2022-0181.Pdf*, 7(2), 287–295. <https://doi.org/10.30574/WJAETS.2022.7.2.0181>

MDI. (2023). Spare Part Inventory Management Best Practices. Retrieved December 24, 2025, from <https://www.mdi.org/blog/post/spare-part-inventory-management-best-practices/>

NSK. (2014). Diagnosis of bearing problems. Objective: Smooth & reliable operation. Retrieved December 24, 2025, from <https://www.nsk.com/content/dam/nsk/common/catalogs/ctrpPdf/bearings/e7005c.pdf>

onecpm.com. (2025). Direct Drive, High-Capacity Pellet Mill. Retrieved December 24, 2025, from https://onecpm.com/wp-content/uploads/2025/06/Direct-Drive-Pellet-Mill_Brochure_April-2025_A4.pdf

Prometheus Group. (2025). Vibration Equipment Analysis for Predictive Maintenance Success. Retrieved December 24, 2025, from <https://www.prometheusgroup.com/learning-center/what-is-vibration-equipment-analysis>

Salas-Bringas, C., Filbakk, T., Skjevraak, G., Lekang, O.-I., Høibø, O., & Schüller, R. B. (2010). Assessment of a new laboratory die pelleting rig attached to a texture analyzer to predict processability of wood pellets. Energy consumption and pellet strength. Retrieved December 24, 2025, from <https://nrs.blob.core.windows.net/pdfs/nrspdf-b5b02404-217d-4bc2-91e1-00c5c24c70e3.pdf>

Sarkar, S., Ang, B. H., & Liew, C. V. (2013). Influence of Starting Material Particle Size on Pellet Surface Roughness. *AAPS PharmSciTech* 2013 15:1, 15(1), 131–139. <https://doi.org/10.1208/S12249-013-0031-5>

Scribd.com. (2025). Pellet Machine Drive Type and Compression Ratio Guide. Retrieved December 24, 2025, from <https://www.scribd.com/document/867251447/Pellet-Machine-Guide>

Söyler, M. A., & Çelik, İ. (2021). Pelet presleri üzerinde verim ve ömür iyileştirmesine etki edebilecek faktörlerin incelenmesi. *Art & Design-2021 International Congress on Art and Design Research and Exhibition*, 1619–1627. Niğde.

Streetz, H. (2024). Unlocking Efficiency Through Advanced Lubrication | Biomass Magazine. Retrieved December 24, 2025, from <https://biomassmagazine.com/articles/unlocking-efficiency-through-advanced-lubrication>

Timken. (2019). Bearing Damage Analysis. Retrieved December 24, 2025, from

https://www.timken.com/resources/timken-bearing-damage-analysis-poster_7352-small/

Turner, R. (2019). Pellet mill die and roll design. Retrieved December 24, 2025, from https://img.feedstrategy.com/files/base/wattglobalmedia/all/document/2019/09/fs.1-4_Die_and_Roll_Design.pdf

ubts.net. (2025). Pellet Mill Die Restoration. Retrieved December 24, 2025, from <https://ubts.net/en/services/pellet-mill-die-restoration>

ud-machine.com. (2024). Peletleme İşlemini Anlamak: Teknikler, Faydalar ve Uygulamalar. Retrieved December 24, 2025, from <https://ud-machine.com/tr/blog/what-is-the-pelletizing-technique/>

Valvoline. (2025). Valvoline Greases for Pellets Production - ValvolineTM Global KSA - EN. Retrieved December 24, 2025, from <https://www.valvolineglobal.com/en-ksa/pellet-machine-grease/>

Verdantis. (2025). Spare Parts Criticality & Its Assessment. Retrieved December 24, 2025, from <https://www.verdantis.com/critical-spares-management/>

vikinganalytics.se. (2025). Vibration Analysis 101: Beginner's Guide to Predictive Maintenance. Retrieved December 24, 2025, from <https://www.vikinganalytics.se/blog/vibration-analysis-101-beginners-guide-to-predictive-maintenance>

Weima. (2025). High-torque drive from WEIMA - energy-efficient drive train. Retrieved December 24, 2025, from <https://weima.com/en/high-torque-drive/>

WorkTrek. (2025). 5 Types of Predictive Maintenance You Need to Know About - WorkTrek. Retrieved December 24, 2025, from <https://worktrek.com/blog/predictive-maintenance-types/>

Wu, K., Shi, S., Ding, W., Peng, B., & Sun, Y. (2010). Influence of die speed on the energy consumption in the pelleting process. *2010 International Conference on Computing, Control and Industrial Engineering, CCIE 2010, 1*, 247–250. <https://doi.org/10.1109/CCIE.2010.70>

Yemsa Makina. (2025). Pelet Makinası ve Peletleme Teknolojisinin Geleceği. Retrieved December 24, 2025, from <https://www.yemsa.com.tr/pelet-makinasi-ve-peletleme-teknolojisinin-gelecegi/>

Yuda Machinery. (2023). How Does a Pellet Mill Improve Feed Production Efficiency? Retrieved December 24, 2025, from <https://www.yudamachinery.com/news/industry-news/how-does-a-pellet-mill-improve-feed-production-efficiency.html>